

AmericanAirFilter®**AstroVee****High Efficiency Particulate Air Filters (HEPA)**

- *Rigid Construction Improves Performance Under Turbulent Operating Conditions*
- *High air volume capacity*
- *H12 and H13 to EN1822*



AstroVee is a heavy duty, high efficiency particulate air filter (HEPA) designed for both Constant Air Volume (CAV) and Variable Air Volume (VAV) systems.

The AstroVee filter is made of multiple mini pleat media packs assembled in a V-shaped configuration, into an electro-galvanized steel housing with an aluminium flange at the air entry side. This configuration substantially increases the amount of media contained in the filter over conventional rigid type filter. In existing installations, the filter's high media area ensures low pressure drop, which reduces energy cost. The filter is designed for installation in AHU's.

It is suitable for use in hospital operating theatres, semi-conductor, microelectronic, food and pharmaceutical industries and gasturbine inlet applications where airborne contaminants must be carefully controlled.

High Capacity, Mini-Pleat Design

The AstroVee is made from ultra fine, moisture resistance and fire retardant fiberglass media. Separators made from special thermoplastic beads maintain even spacing between pleats for optimal airflow with minimal air resistance. The consistent pleat spacing of the media allows higher dust holding capacity and full use of the entire depth of the media.

The rigid metal construction improves performance under turbulent operating conditions. The AstroVee is ideal for extremely difficult conditions such as high turbulence and frequent fan shut down.

High Air Volume Capacity

The filter is designed for use in high air volume applications up to 4000 m³/h. Its high capacity design provide competitive advantage to other conventional HEPA filter of the same size; fewer filters are required to handle the same volume of air in the systems, which reduces costs, installation space and time.

For system operating at lower velocities, the AstroVee service life will be significantly prolonged thus reducing the operating cost further.

Classification

All AstroVee HEPA filters are classified H12 or H13 to EN1822.

Specification

Maximum Operating Temperature	: 70°C (158°F)
Media	: High efficiency, water resistant glass fibre
Separators	: Hot melt
Cell sides and Header	: Black powder coat G.I. and aluminium
Gasket	: Gasket on clean air side as standard

Standard Sizes and Ratings


H	Size in mm without gasket		D	Media area m ²	Nominal airflow m ³ /h
	W				
592	287		292	15	1500
592	592		292	30	3400

Notes: - Final resistance 750 Pa.
 - Initial resistance at nominal airflow: 275 Pa.
 - Filters can operate up to 125% of rated volume

Efficiency

Efficiency @ 0.3 µm		Efficiency EN1822 @ MPPS	
99.97%		H12	99.5%
99.99%		H13	99.95%

Airflow Versus Resistance

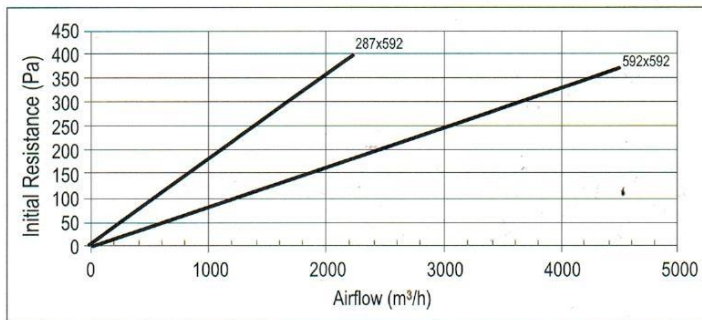

Better Air is Our Business®

American Air Filter Manufacturing Sdn. Bhd.
 Lot 6, Jalan Pengapil, 15/19,
 Seksyen 15, 40000 Shah Alam,
 Selangor, Malaysia.
 Email: enquires@aafmal.com
 Website: www.aafasia.com

Tel: +603 5039 7777 / Fax: +603 5511 8633

ISO 9001:2008 & ISO 14001:2004 Certified

AAF has a policy of continuous product research and improvement and reserves the right to change design and specifications without notice.

©2012 AAF Malaysia
 AV-03-MAL/MAR 12